



i2b2

Software Documentation

i2b2 Design Document

Workplace Framework (WORK) Cell

TABLE OF CONTENTS

DOCUMENT MANAGEMENT	4
1 INTRODUCTION	5
2 WORKPLACE CONCEPT	6
2.1 OBJECTIVES OF WORKPLACE VIEW.....	6
2.2 IDENTIFICATION OF USERS.....	6
2.2.1 <i>Clinical Researcher</i>	6
2.2.2 <i>Manager of Clinical Researcher</i>	7
3 REQUIREMENTS	8
3.1 FUNCTIONAL REQUIREMENTS	8
3.1.1 <i>Storing Concepts</i>	8
3.1.2 <i>Storing Patient Sets or Lists</i>	10
3.1.3 <i>Storing Previous Queries</i>	12
3.1.4 <i>Storing Query Definitions</i>	12
3.1.5 <i>Storing Group Templates</i>	13
3.1.6 <i>Storing Observations</i>	14
3.1.7 <i>Storing Patients</i>	14
3.1.8 <i>Storing XML Results</i>	15
3.1.9 <i>Exporting Nodes</i>	16
3.2 DATA OBJECTS	16
3.3 TABLE USAGE	17
3.3.1 <i>User Viewing Their Workplace</i>	17
3.3.2 <i>Manager Viewing Their Employee’s Workplace</i>	18
4 ARCHITECTURE AND DESIGN PRINCIPLES	19
4.1 METHODOLOGY	19
4.2 DEVELOPMENT AND RUNTIME ENVIRONMENT	19
4.3 CONFIGURATION MANAGEMENT.....	19
5 XML DATA	20
5.1 STORED XML.....	20
5.1.1 <i>Storing Concepts</i>	20
5.1.2 <i>Storing Patient Collections</i>	21
5.1.3 <i>Storing Encounter Collections</i>	22
5.1.4 <i>Storing Previous Queries</i>	23
5.1.5 <i>Storing Query Definitions</i>	23
5.1.6 <i>Storing Group Templates</i>	24
5.1.7 <i>Storing Observations</i>	25
5.1.8 <i>Storing Individual Patient</i>	26
5.1.9 <i>Storing Generic XML Results</i>	27
6 TABLES	29
6.1 WORKPLACE TABLE	29
6.2 WORKPLACE_ACCESS TABLE	30
6.3 WORK_DB_LOOKUP TABLE	31
7 GLOSSARY	32

7.1 GENERAL TERMS32

DOCUMENT MANAGEMENT

Revision Number	Date	Author	Description of change
1.7.0	3/13/13	Janice Donahoe	Created 1.7 version of document
1.7.00-001	08/14/2015	Janice Donahoe	Fixed minor spelling and grammar issues.
1.7.08-002	10/04/2016	Janice Donahoe	Updated cover and fixed revision numbering.

1 INTRODUCTION

This document describes the requirements, technical functionality and intended capabilities of the **Workplace**. It is to be used as a guideline and continuing reference as the developers write the code.

2 WORKPLACE CONCEPT

This section includes the following three subsections.

1. *Objectives* section provides a high level outline of the goals for the work to be done.
2. *Identification of Users* section makes note of who the intended audience of the product is and how it will be used in practice.
3. *Definition of Terms* section is a glossary of terms used throughout the document.

2.1 Objectives of Workplace View

Information in the workplace is related to the most common concepts and queries that an individual uses and in essence becomes their personal workplace. There are three main objectives of this view.

1. Save and organize user specific workplace.
2. Share information with other project users.
3. Workplace for all team members; can be viewed only by the project manager.

2.2 Identification of Users

2.2.1 Clinical Researcher

- Member of the research team who is setup with access to the project in i2b2.
- Their access role is “USER”.
- Can create and organize own workplace.
- Share information from their workplace with other users.
- Access information shared by other users.

2.2.2 Manager of Clinical Researcher

- Manager of the research team for the project.
- Their access role is “MANAGER”.
- Can create and organize own workplace.
- Share information from their workplace with other users.
- Access information shared by other users.
- View workplace of employee(s)

3 REQUIREMENTS

3.1 Functional Requirements


To assist with workflow and overall ease of use, individual will now be able to easily say key concepts, common queries and valuable patient sets in one central location. In addition, they will be able to combine these areas as well as others to formulate templates to assist in the process of gathering information throughout the project. An outline of what can be stored in the workplace and the related functionality is listed below.

3.1.1 Storing Concepts


Concepts are used throughout i2b2 for a number of things but they are primarily used in queries, defining a model for the timeline or in the image view.

By using the mouse, users will be able to drag concepts from the **Ontology, Query Tool, or Timeline** views. You may drag a single or multiple concepts from the view to the workspace.


Ontology Views

 **Note**


The ontology views include **Navigate Terms, Find Terms, and Edit Terms.**

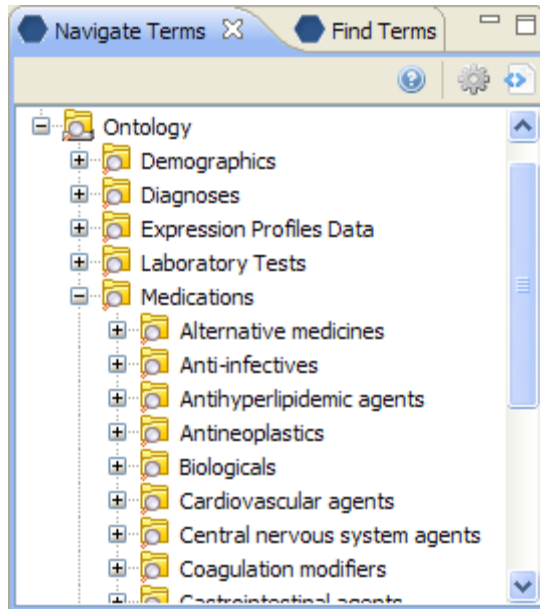

Query Tool View

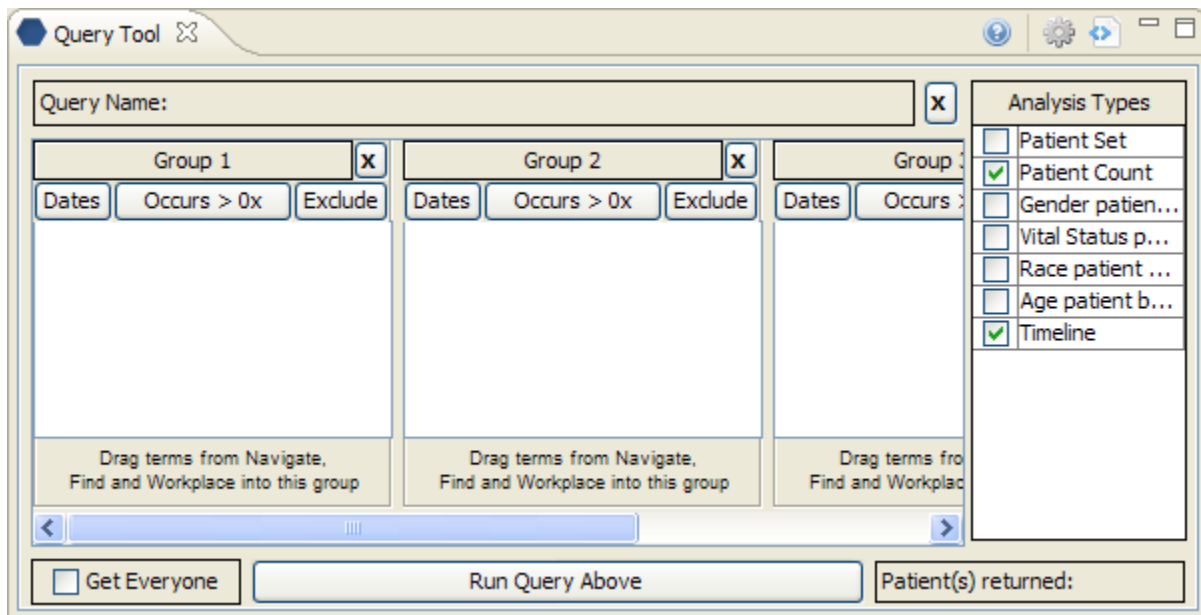


Timeline View

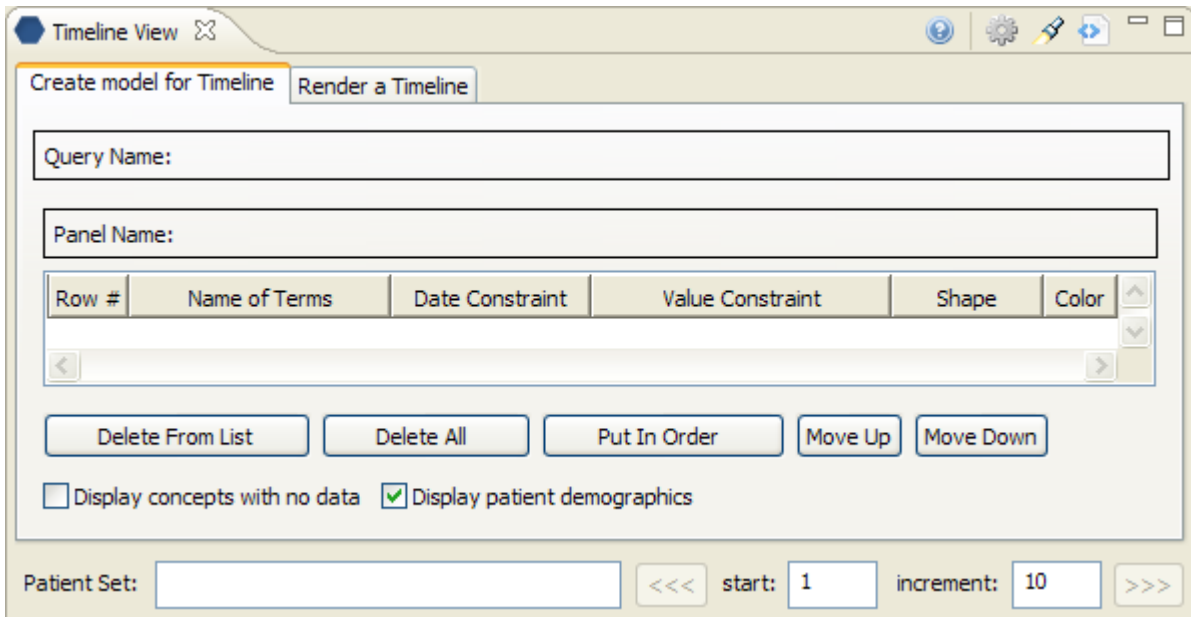


3.1.2 Storing Patient Sets or Lists

By using the mouse, users are able to drag patient sets from **Previous Query View** or **Timeline View** into their workplace.

Previous Query; patient list

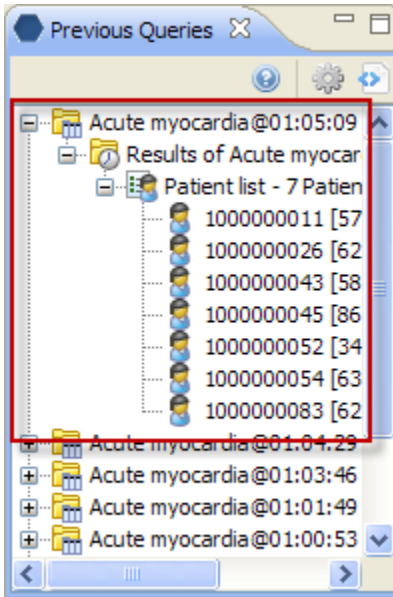


Timeline; patient set

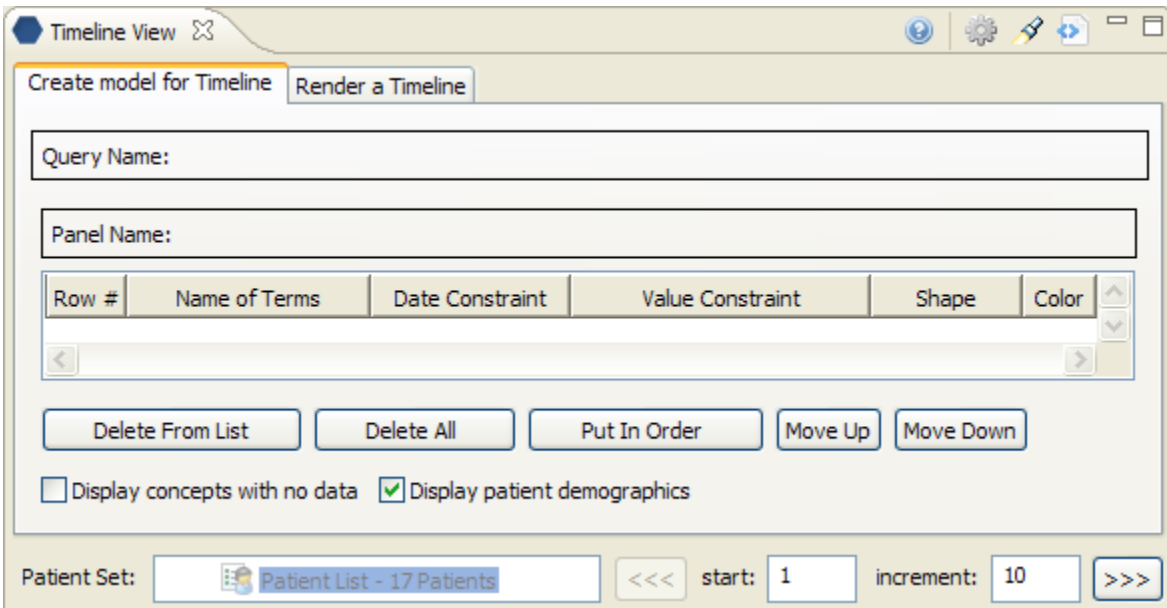

3.1.3 Storing Previous Queries

Previous queries can be dragged from **Previous Queries** into the workplace.


Previous Query

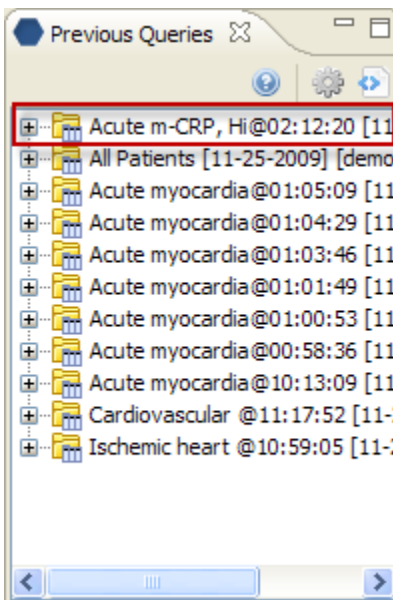

3.1.4 Storing Query Definitions

By using the mouse, users can drag queries by their *name* from the locations listed below into their workplace.


Query Tool Panel (Query Name field)

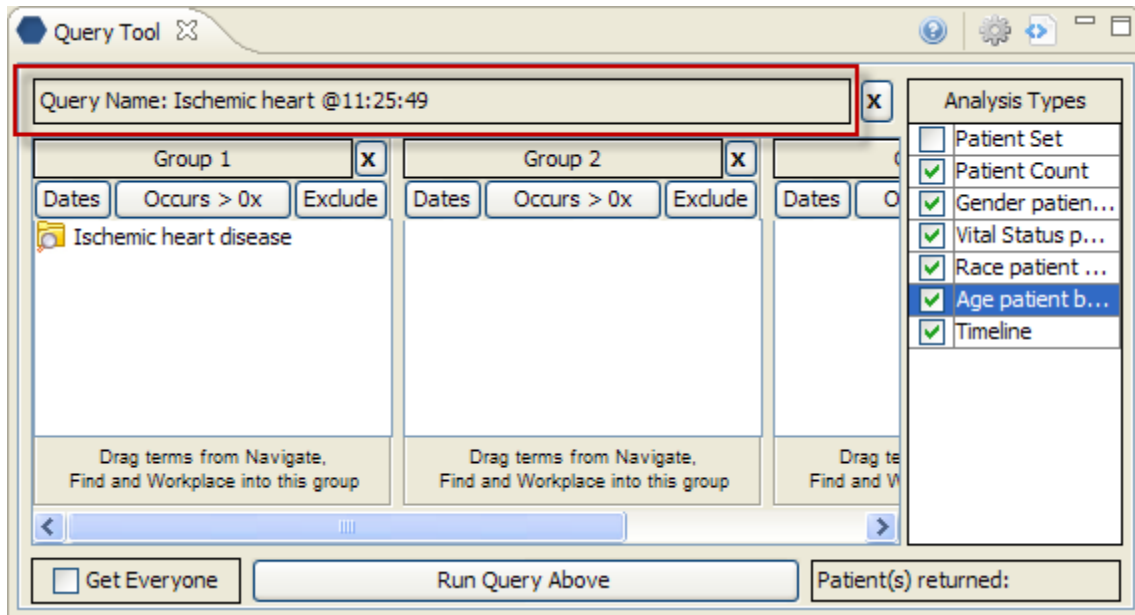

3.1.5 Storing Group Templates


By using the mouse, users can drag *group templates* from the locations listed below into their workplace.

Query Tool Panel (Group label)

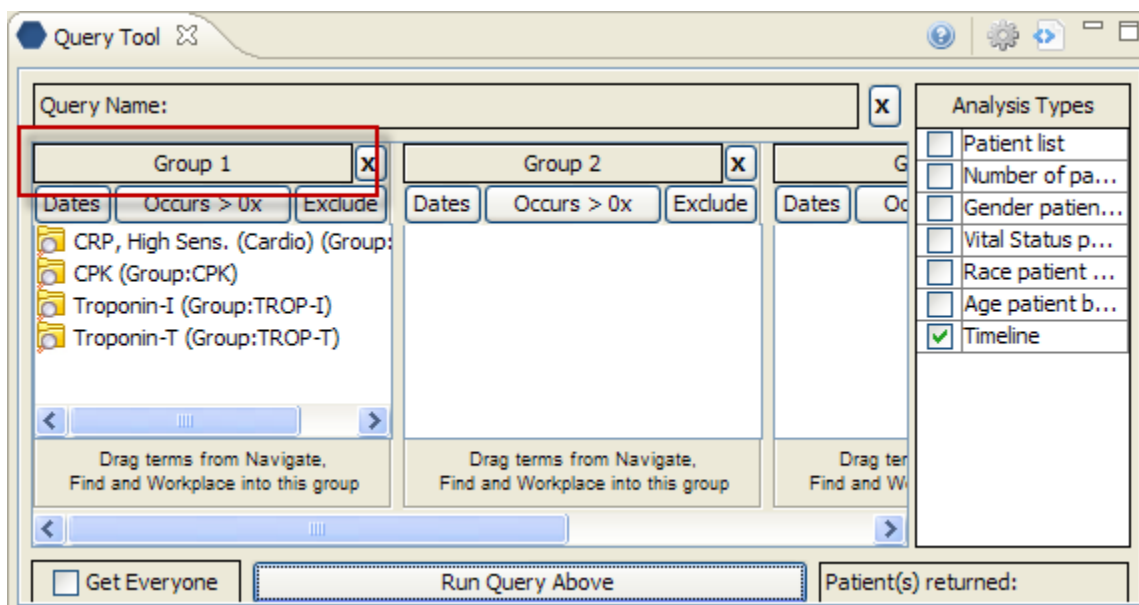

3.1.6 Storing Observations


By using the mouse, users can store *observations* such as patient notes from the **Timeline View's Notes Viewer**. Simply place the cursor within the notes viewer and drag to the Workplace view.

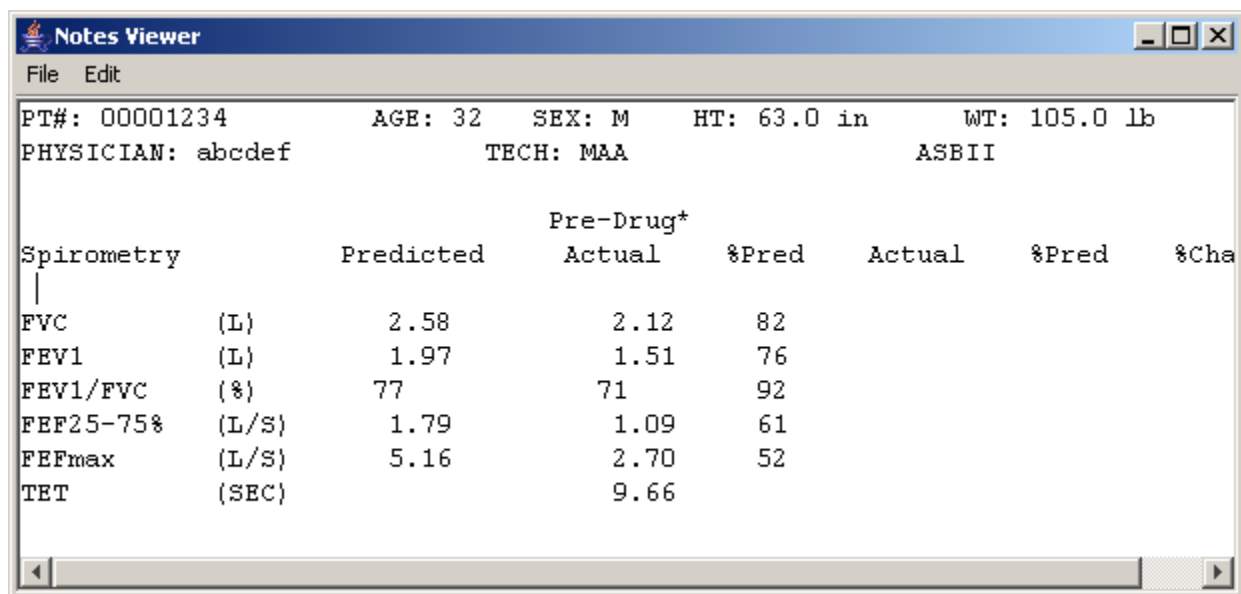

3.1.7 Storing Patients

A patient can be dragged from **Previous Queries** into the workplace.


Previous Query

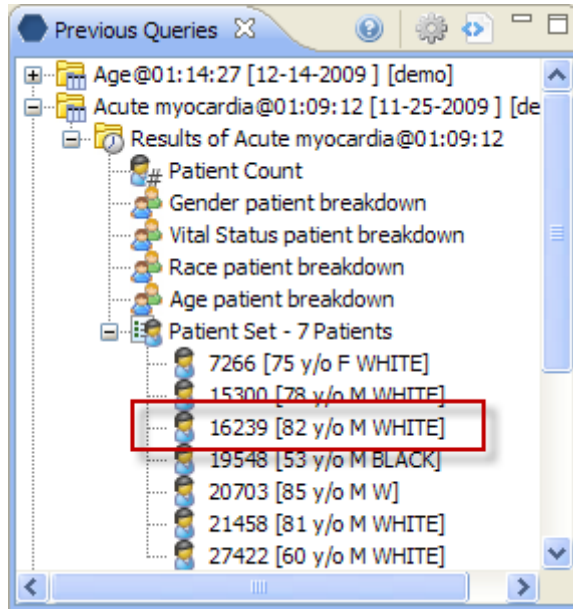

3.1.8 Storing XML Results

By using the mouse, users can store *XML Results* such as patient count from **Previous Queries**.

Previous Query (Number of patients)

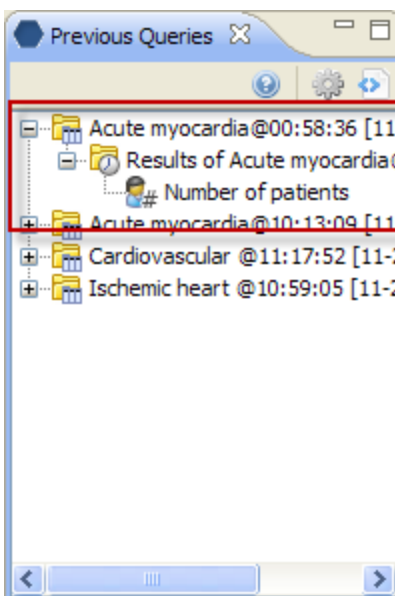

3.1.9 Exporting Nodes

By using the mouse, users can store *XML Results* such as patient count from **Previous Queries**. Right click on the node and select **Export** then specify a name for the XML file.

3.2 Data Objects

Valid XML data objects that can be dragged from one area to another must be one of the following types:

Draggable Items:

WORK_XML i2b2 Type	Description / Name	From View
QUERY_DEFINITION	Query definition	Query Tool (Query Name)
PREV_QUERY	Query formulation	Previous Query
PATIENT_COLL	Patient list, Timeline	Previous Query, Timeline
ENCOUNTER_COLL	Encounter set	Previous Query
GROUP_TEMPLATE	Set of concept specifications	Query Tool (Group label)
CONCEPT	Single term	Ontology, Query Tool, Timeline
PATIENT	Single patient	Previous Query
OBSERVATION	Single patient observation	Timeline View - Notes viewer
EVENT	Single patient event	TBD
OBSERVER	Single observer	TBD
PDO	Set of multiple patient data types	TBD
XML_RESULTS	Generic query result	Previous Query (Patient count)

3.3 Table Usage

3.3.1 User Viewing Their Workplace

The functionality for when a user views their workplace is described in this section.

User Logs Into i2b2

- The PM returns the roles for a given project
- Role = USER
- Query **WORKPLACE_ACCESS** table by *USER_ID*
- A list of all workplaces owned by that USER for the project they are logged into is returned. This list contains *TableCd*, *TableName* (\\demo, WORKPLACE, etc.)

Returning Root Level Folders For The User And Project

- A key (*tableCd*) from home workplace table will prepend the node's index string so that subsequent calls can be sent to the appropriate workplace table.

Double Click Root Level Folder

- Query **WORKPLACE_ACCESS** to perform key to table name translation
- Query returns **WORKPLACE_TABLE_NAME** to get children of that root node.
- A key from home workplace table will prepend the child node's index string so that subsequent calls can be set to the appropriate workplace table.

Drag A Leaf

- Extract **WORK_XML** contents (DnD xml) and drag to appropriate drop site.

3.3.2 Manager Viewing Their Employee's Workplace

The functionality for when a manager views the workplace of all the users of a given project.

User Logs Into i2b2

- The PM returns the roles for a given project
- Role = MANAGER
- Query **WORKPLACE_ACCESS** table by *PROJECT*
- A list of all workplaces for the PROJECT they are logged into is returned. This list contains *TableCd*, *TableName* (\\demo, WORKPLACE, etc.)

Returning Root Level Folders For The User And Project

- A key (*tableCd*) from home workplace table will prepend the node's index string so that subsequent calls can be sent to the appropriate workplace table.

Double Click Root Level Folder

- Query **WORKPLACE_ACCESS** to perform key to table name translation
- Query returns **WORKPLACE_TABLE_NAME** to get children of that root node.
- A key from home workplace table will prepend the child node's index string so that subsequent calls can be set to the appropriate workplace table.

Drag A Leaf

- Extract **WORK_XML** contents (DnD xml) and drag to appropriate drop site.

4 ARCHITECTURE AND DESIGN PRINCIPLES

Detailed information regarding the architecture can be found in the **i2b2 Cell Architecture documents** for each cell. This section provides a brief overview of the architecture and design principles.

4.1 Methodology

The **Workplace Management (WORK) Cell** is a core i2b2 hive cell that manages project specific XML data objects for users of a given project. The project specific XML data objects originate in other views or cells, such as Ontology or Previous Query and are stored in the WORK cell as a convenience.

The project specific XML data objects in the WORK cell are organized in hierarchical structures that represent the relationships between elements. The WORK cell accepts new XML data objects for storage and provides a listing of those items previously stored. It also allows users to organize, label and annotate the stored data objects however they choose.

4.2 Development and Runtime Environment

- Java 2 Standard Edition 7.0
- Oracle Server 10g/11g database
- SQL Server 2005/2008
- Xerces2 XML parser
- Jboss Application server version 7.1.1
- Spring Web Framework 2.0
- Axis2 1.6.2 web service (SOAP / REST)

4.3 Configuration Management

The WORK system is transactional, leveraging the transaction management model of the J2EE platform.

5 XML DATA

Detailed information regarding XML messaging can be found in the **i2b2 Cell Messaging documents** for each cell. This section contains information regarding stored xml content as it pertains to the functionality / usage of the workplace features.

5.1 Stored XML

Plug-ins developed for i2b2 must send XML formatted strings as drag / drop messages between plug-ins. The XML content stored by the workplace consists of any XML contents inside of a `<plugin_drag_drop>` tag. The namespace for the schema that defines the `plugin_drag_drop` XML is <http://www.i2b2.org/xsd/hive/plugin/>

```
<i2b2:plugin_drag_drop>
  <!-- any xml content -->
</i2b2:plugin_drag_drop>
```

The various XML content message formats and their drag source are described throughout the specification.

5.1.1 Storing Concepts

Concepts may be dragged from the *Ontology*, *Query Tool*, and *Timeline* views. The namespace for the schema that defines the Concepts XML content is <http://www.i2b2.org/xsd/cell/ont/1.1/>

The `plugin_drag_drop` XML message for concepts is as follows:

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<plugin_drag_drop xmlns:ns4="http://www.i2b2.org/xsd/cell/ont/1.1/"
  xmlns:ns3="http://www.i2b2.org/xsd/hive/msg/1.1/"
  xmlns:ns2="http://www.i2b2.org/xsd/hive/plugin/">
  <concepts>
    <concept>
      <level>3</level>
      <key>\\i2b2\i2b2\Diagnoses\Circulatory system (390-459)\Acute Rheumatic fever
(390-392)</key>
      <name>Acute Rheumatic fever</name>
      <synonym_cd>N</synonym_cd>
```

```

        <visualattributes>FA</visualattributes>
        <totalnum>0</totalnum>
        <facttablecolumn>concept_cd</facttablecolumn>
        <tablename>concept_dimension</tablename>
        <columnname>concept_path</columnname>
        <columndatatype>T</columndatatype>
        <operator>LIKE</operator>
        <dimcode>\i2b2\Diagnoses\Circulatory system (390-459)\Acute Rheumatic fever
(390-392)</dimcode>
        <tooltip>Diagnoses \ Circulatory system \ Acute Rheumatic fever</tooltip>
    </concept>
</concepts>
</plugin_drag_drop>

```

5.1.2 Storing Patient Collections

A patient collection (or set) may be dragged from the *Previous Query* view. The namespace for the schema that defines the Patient Collection XML content is <http://www.i2b2.org/xsd/cell/crc/psm/1.1/>

The plugin_drag_drop XML message for a patient collection is as follows:

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<plugin_drag_drop xmlns:ns4="http://www.i2b2.org/xsd/cell/crc/psm/1.1/"
xmlns:ns7="http://www.i2b2.org/xsd/cell/crc/psm/querydefinition/1.1/"
xmlns:ns3="http://www.i2b2.org/xsd/cell/crc/pdo/1.1/"
xmlns:ns5="http://www.i2b2.org/xsd/hive/plugin/"
xmlns:ns2="http://www.i2b2.org/xsd/hive/pdo/1.1/"
xmlns:ns6="http://www.i2b2.org/xsd/hive/msg/1.1/">
    <query_result_instance>
        <result_instance_id>804</result_instance_id>
        <query_instance_id>Chemistry@02:22:19 [09-19-2008 ]
[demo]</query_instance_id>
        <query_result_type>
            <result_type_id>1</result_type_id>
            <name>PATIENTSET</name>
            <description>Patient list</description>
        </query_result_type>
        <set_size>130</set_size>
        <start_date>2008-09-19T14:22:21.000-04:00</start_date>
        <end_date>2008-09-19T14:22:22.000-04:00</end_date>
        <query_status_type>
            <status_type_id>3</status_type_id>

```

```

        <name>FINISHED</name>
        <description>FINISHED</description>
    </query_status_type>
</query_result_instance>
</plugin_drag_drop>

```

5.1.3 Storing Encounter Collections

An encounter collection (or set) may be dragged from the *Previous Query* view. The namespace for the schema that defines the Encounter Collection XML content is <http://www.i2b2.org/xsd/cell/crc/psm/1.1/>

The plugin_drag_drop XML message for an encounter collection is as follows:

```

<ns5:plugin_drag_drop
  xmlns:ns5="http://www.i2b2.org/xsd/hive/plugin/"
  xmlns:ns2="http://www.i2b2.org/xsd/hive/msg/1.1/"
  xmlns:ns3="http://www.i2b2.org/xsd/cell/work/1.1/"
  xmlns:ns4="http://www.i2b2.org/xsd/cell/pm/1.1/"
  xmlns:tns="http://ws.workplace.i2b2.harvard.edu">

  <ns4:query_result_instance
    xmlns:ns4="http://www.i2b2.org/xsd/cell/crc/psm/1.1/">
    <result_instance_id>322</result_instance_id>
    <query_instance_id>322</query_instance_id>
    <description>Encounter Set - 295 encounters</description>
    <query_result_type>
      <result_type_id>2</result_type_id>
      <name>PATIENT_ENCOUNTER_SET</name>
      <display_type>LIST</display_type>
      <visual_attribute_type>LA</visual_attribute_type>
      <description>Event list</description>
    </query_result_type>
    <set_size>295</set_size>
    <obfuscate_method />
    <start_date>2010-11-29T10:16:09.003-05:00</start_date>
    <end_date>2010-11-29T10:16:12.030-05:00</end_date>
    <message />
    <query_status_type>
      <status_type_id>3</status_type_id>
      <name>FINISHED</name>

```

```

        <description>FINISHED</description>
    </query_status_type>
</ns4:query_result_instance>
</ns5:plugin_drag_drop>

```

5.1.4 Storing Previous Queries

A previous query may be dragged from the *Previous Query* view. The namespace for the schema that defines the Previous Query XML content is <http://www.i2b2.org/xsd/cell/crc/psm/1.1/>

The plugin_drag_drop XML message for a previous query is as follows:

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<plugin_drag_drop xmlns:ns4="http://www.i2b2.org/xsd/cell/crc/psm/1.1/"
xmlns:ns7="http://www.i2b2.org/xsd/cell/crc/psm/querydefinition/1.1/"
xmlns:ns3="http://www.i2b2.org/xsd/cell/crc/pdo/1.1/"
xmlns:ns5="http://www.i2b2.org/xsd/hive/plugin/"
xmlns:ns2="http://www.i2b2.org/xsd/hive/pdo/1.1/"
xmlns:ns6="http://www.i2b2.org/xsd/hive/msg/1.1/">
    <query_master>
        <query_master_id>742</query_master_id>
        <name>Chemistry@02:22:19 [09-19-2008 ] [demo]</name>
        <user_id>demo</user_id>
        <group_id>BIRN</group_id>
    </ns4:query_master>
</ns5:plugin_drag_drop>

```

5.1.5 Storing Query Definitions

A query definition may be dragged from the Query Name field of the *Query Tool* view. The namespace for the schema that defines the Query Definition XML content is <http://www.i2b2.org/xsd/cell/crc/psm/querydefinition/1.1/>

The plugin_drag_drop XML message for a query definition is as follows:

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>

```

```

<plugin_drag_drop xmlns:ns4="http://www.i2b2.org/xsd/cell/crc/psm/1.1/"
xmlns:ns3="http://www.i2b2.org/xsd/cell/crc/pdo/1.1/"
xmlns:ns5="http://www.i2b2.org/xsd/hive/plugin/"
xmlns:ns2="http://www.i2b2.org/xsd/hive/pdo/1.1/"
xmlns:ns6="http://www.i2b2.org/xsd/hive/msg/1.1/"
xmlns:ns8="http://www.i2b2.org/xsd/cell/crc/psm/querydefinition/1.1/">
  <query_definition>
    <query_name>Chemistry_nqVg</query_name>
    <specificity_scale>0</specificity_scale>
    <panel>
      <panel_number>1</panel_number>
      <panel_accuracy_scale>0</panel_accuracy_scale>
      <invert>0</invert>
      <total_item_occurrences>1</total_item_occurrences>
      <item>
        <hlevel>2</hlevel>
        <item_name>Chemistry</item_name>
        <item_key>\\i2b2\i2b2\Labtests\LAB\LLB16) Chemistry</item_key>
        <tooltip>Labtests \ Chemistry</tooltip>
        <class>ENC</class>
        <item_is_synonym>>false</item_is_synonym>
      </item>
    </panel>
  </query_definition>
</plugin_drag_drop>

```

5.1.6 Storing Group Templates

A group template may be dragged from the Group label of the *Query Tool* view. The namespace for the schema that defines the Group Template XML content is <http://www.i2b2.org/xsd/cell/crc/psm/querydefinition/1.1/>

The plugin_drag_drop XML message for a group template is as follows:

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<plugin_drag_drop xmlns:ns4="http://www.i2b2.org/xsd/cell/crc/psm/1.1/"
xmlns:ns7="http://www.i2b2.org/xsd/cell/ont/1.1/"
xmlns:ns3="http://www.i2b2.org/xsd/cell/crc/pdo/1.1/"
xmlns:ns5="http://www.i2b2.org/xsd/hive/plugin/"
xmlns:ns2="http://www.i2b2.org/xsd/hive/pdo/1.1/"
xmlns:ns6="http://www.i2b2.org/xsd/hive/msg/1.1/"
xmlns:ns8="http://www.i2b2.org/xsd/cell/crc/psm/querydefinition/1.1/">
  <panel name="Chemistry_IJcW">
    <panel_number>1</panel_number>

```



```

<panel_accuracy_scale>0</panel_accuracy_scale>
<invert>0</invert>
<total_item_occurrences>1</total_item_occurrences>
<item>
  <hlevel>2</hlevel>
  <item_name>Chemistry</item_name>
  <item_key>\\i2b2\i2b2\Labtests\LAB\LLB16) Chemistry</item_key>
  <item_icon>FA</item_icon>
  <tooltip>Labtests \ Chemistry</tooltip>
  <class>ENC</class>
  <item_is_synonym>>false</item_is_synonym>
</item>
<item>
  <hlevel>2</hlevel>
  <item_name>Endocrine disorders</item_name>
  <item_key>\\i2b2\i2b2\Diagnoses\Endocrine disorders (240-259)</item_key>
  <item_icon>FA</item_icon>
  <tooltip>Diagnoses \ Endocrine disorders</tooltip>
  <class>ENC</class>
  <item_is_synonym>>false</item_is_synonym>
</item>
</panel>
</plugin_drag_drop>

```

5.1.7 Storing Observations

Currently the only place an observation can be dragged from is the *Note Viewer* in the *Timeline* view. The namespace for the schema that defines the Observations XML content is <http://www.i2b2.org/xsd/hive/pdo/1.1/>

The `plugin_drag_drop` XML message for an observation is as follows:

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<plugin_drag_drop xmlns:ns4="http://www.i2b2.org/xsd/cell/crc/psm/1.1/"
xmlns:ns7="http://www.i2b2.org/xsd/cell/ont/1.1/"
xmlns:ns3="http://www.i2b2.org/xsd/cell/crc/pdo/1.1/"
xmlns:ns5="http://www.i2b2.org/xsd/hive/plugin/"
xmlns:ns2="http://www.i2b2.org/xsd/hive/pdo/1.1/"
xmlns:ns6="http://www.i2b2.org/xsd/hive/msg/1.1/"
xmlns:ns8="http://www.i2b2.org/xsd/cell/crc/psm/querydefinition/1.1/">
  <observation_set>
    <observation>
      <event_id>1000000002</event_id>

```

```

<patient_id>1000000002</patient_id>
<concept_cd>LCS-I2B2:pul</concept_cd>
<observer_cd>@</observer_cd>
<start_date>2008-06-24T16:24:00.000-04:00</start_date>
<modifier_cd>1</modifier_cd>
<valuetype_cd>B</valuetype_cd>
<tval_char></tval_char>
<nval_num/>
<valueflag_cd></valueflag_cd>
<location_cd></location_cd>
<observation_blob>
  PT#: 00001234      AGE: 32  SEX: M  HT: 63.0 in  WT: 105.0 lb
  PHYSICIAN: abcdef      TECH: MAA      ASBII

  Pre-Drug*
  Spirometry      Predicted  Actual  %Pred  Actual  %Pred  %Change

  FVC      (L)      2.58    2.12   82
  FEV1     (L)      1.97    1.51   76
  FEV1/FVC (%)      77      71     92
  FEF25-75% (L/S)  1.79    1.09   61
  FEFmax   (L/S)  5.16    2.70   52
  TET      (SEC)      9.66

</observation_blob>
</observation>
</observation_set>
</plugin_drag_drop>

```

5.1.8 Storing Individual Patient

The only place a patient can be dragged from is the *Previous Query* view. The namespace for the schema that defines the Patient set XML content is <http://www.i2b2.org/xsd/hive/pdo/1.1/>

The plugin_drag_drop XML message for a patient is as follows:

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<plugin_drag_drop xmlns:ns4="http://www.i2b2.org/xsd/cell/crc/psm/1.1/"
xmlns:ns7="http://www.i2b2.org/xsd/cell/crc/psm/querydefinition/1.1/"
xmlns:ns3="http://www.i2b2.org/xsd/cell/crc/pdo/1.1/"
xmlns:ns5="http://www.i2b2.org/xsd/hive/plugin/"
xmlns:ns2="http://www.i2b2.org/xsd/hive/pdo/1.1/"
xmlns:ns6="http://www.i2b2.org/xsd/hive/msg/1.1/">

```

```

    <patient_set patient_set_name="Pulmonary Funct@09:22:00 [10-06-2008 ] [demo]"
    patient_set_id="122">
      <patient>
        <patient_id>1000000002</patient_id>
      </patient>
    </patient_set>
  </plugin_drag_drop>

```

5.1.9 Storing Generic XML Results

Generic XML Results such as Patient Count may be dragged from the *Previous Query* view. The namespace for the schema that defines the XML content for the Generic XML Results is <http://www.i2b2.org/xsd/cell/crc/psm/1.1/>

The plugin_drag_drop XML message for a Patient Count XML Result is as follows:

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<plugin_drag_drop xmlns:ns4="http://www.i2b2.org/xsd/cell/crc/psm/1.1/"
xmlns:ns7="http://www.i2b2.org/xsd/cell/crc/psm/querydefinition/1.1/"
xmlns:ns3="http://www.i2b2.org/xsd/cell/crc/pdo/1.1/"
xmlns:ns5="http://www.i2b2.org/xsd/hive/plugin/"
xmlns:ns2="http://www.i2b2.org/xsd/hive/pdo/1.1/"
xmlns:ns6="http://www.i2b2.org/xsd/hive/msg/1.1/">
  <query_result_instance>
    <result_instance_id>803</result_instance_id>
    <query_instance_id>Chemistry@02:22:19 [09-19-2008 ]
[demo]</query_instance_id>
    <query_result_type>
      <result_type_id>4</result_type_id>
      <name>PATIENT_COUNT_XML</name>
      <description>Number of patients</description>
    </query_result_type>
    <set_size>130</set_size>
    <start_date>2008-09-19T14:22:21.000-04:00</start_date>
    <end_date>2008-09-19T14:22:22.000-04:00</end_date>
    <query_status_type>
      <status_type_id>3</status_type_id>
      <name>FINISHED</name>
      <description>FINISHED</description>
    </query_status_type>
  </query_result_instance>
</plugin_drag_drop>

```


6 TABLES

6.1 WORKPLACE Table

The WORKPLACE table is organized by project and contains all the information needed to store and access workplace items. There is one table per project.

WORKPLACE TABLE			
	COLUMN NAME	DATA TYPE	DESCRIPTION
PK	C_INDEX	VARCHAR(255)	Unique index of workplace item
	C_NAME	VARCHAR(255)	Name of workplace item
	C_USER_ID	VARCHAR(255)	User id
	C_GROUP_ID	VARCHAR(255)	Project name
	C_SHARE_ID	VARCHAR(255)	(null) or "Y" or "N"
	C_PARENT_INDEX	VARCHAR(255)	Unique index of item's parent
	C_VISUALATTRIBUTES	CHAR(3)	Code representing which icon to display
	C_PROTECTED_ACCESS	CHAR(1)	(null) or "Y" or "N"
	C_TOOLTIP	VARCHAR(255)	i2b2Type: annotation (or name)
	C_WORK_XML	CLOB	DnD message contents
	C_WORK_XML_SCHEMA	CLOB	DnD schema contents
	C_WORK_XML_I2B2_TYPE	VARCHAR(255)	DnD i2b2 type
	C_ENTRY_DATE	DATE	(null) or specified
	C_CHANGE_DATE	DATE	(null) or specified
	C_STATUS_CD	CHAR(1)	(null) or "D" (deleted)

6.2 WORKPLACE_ACCESS Table

The WORKPLACE_ACCESS table lists all the workplaces assigned to a project. This includes information needed to display the root node of a user's workplace tree based upon the user's role.

WORKPLACE_ACCESS TABLE			
	COLUMN NAME	DATA TYPE	DESCRIPTION
PK	C_INDEX	VARCHAR(255)	Unique index of workplace item
	C_TABLE_CD	VARCHAR(255)	Code mapping to the workplace table
	C_TABLE_NAME	VARCHAR(255)	Name of workplace table
	C_PROTECTED_ACCESS	CHAR(1)	(null) or "Y" or "N"
	C_HLEVEL	INT	Number representing a level in the tree (0)
	C_NAME	VARCHAR(255)	Name of workplace item
	C_USER_ID	VARCHAR(255)	User id
	C_GROUP_ID	VARCHAR(255)	Project name
	C_SHARE_ID	VARCHAR(255)	(null) or "Y" or "N"
	C_PARENT_INDEX	VARCHAR(255)	(null)
	C_VISUALATTRIBUTES	CHAR(3)	Code representing which icon to display
	C_TOOLTIP	VARCHAR(255)	i2b2Type: annotation (or name)
	C_ENTRY_DATE	DATE	(null) or specified
	C_CHANGE_DATE	DATE	(null) or specified
	C_STATUS_CD	CHAR(1)	(null) or "D" (deleted)

6.3 WORK_DB_LOOKUP Table

Workplace data is distributed to project through the existence of independent databases (in SQL Server) or schemas (in Oracle). In order to support the i2b2 project distribution strategy, the user may be enrolled in numerous projects recorded within the i2b2 Project Management Cell. The logic for selecting the correct database or schema for a project is embodied in the following table:

WORK_DB_LOOKUP			
	COLUMN NAME	DATA TYPE	DESCRIPTION
PK	C_DOMAIN_ID	VARCHAR(255)	Domain (or target location)
PK	C_PROJECT_PATH	VARCHAR(255)	'Project name\'
PK	C_OWNER_ID	VARCHAR(255)	User ID of owner
	C_DB_FULLSCHEMA	VARCHAR(255)	Full schema name of the workplace table
	C_DB_DATASOURCE	VARCHAR(255)	Data source pointing to the workplace table location
	C_DB_SERVERTYPE	VARCHAR(255)	Database type of workplace table (ORACLE or SQLSERVER)
	C_DB_NICENAME	VARCHAR(255)	Table name
	C_DB_TOOLTIP	VARCHAR(255)	Workplace tooltip
	C_COMMENT	CLOB	Optional comment
	C_ENTRY_DATE	DATE	(null) or specified
	C_CHANGE_DATE	DATE	(null) or specified
	C_STATUS_CD	CHAR(1)	(null) or "D" (deleted)

7 GLOSSARY

7.1 General Terms

The following table contains terms that are used throughout this document.

Term	Definition
Concepts	A locution or word given to represent a number of different items in the i2b2 realm. These items can include terms, providers and codes from standardized coding systems.
CRC	Clinical Research Chart. Also referred to as the Data Repository Cell .
Drag and Drop	Phrase used to describe the action of moving or copying items (queries, patient sets, etc.) from one location to another. "Drag" is done by clicking on the item to be moved and while holding down the button on the mouse, move the mouse and in essence the item to the area on the screen in which you want to place it. "Drop" is the action of releasing the button and placing the item in the new location.
Draggable Item	Only certain items can be "dragged" to another location (see drag and drop definition).
Encounter	This represents a "session" where observations were made. This "session" can involve a patient directly such as a visit to a doctor's office, or it can involve the patient indirectly such as running several tests on a tube of the patient's blood. <i>Encounters, Events, and Visits</i> are all synonyms.
Events	This represents a "session" where observations were made. This "session" can involve a patient directly such as a visit to a doctor's office, or it can involve the patient indirectly such as running several tests on a tube of the patient's blood. <i>Encounters, Events, and Visits</i> are all synonyms.
Group Template	A grouping of query items. It is also known as a panel. See <i>panel</i> for definition.
Item	This is a subsection for a panel in <i>query definition xml</i> . This represents metadata constraints like concept key, concept name, hlevel, modifier, etc.
NLP	Natural Language Processing is a core cell in the i2b2 hive. It is an AI service, which extracts different concepts from patient notes.
Observations	Observations are collections of phenotypic data and may contain values associated with a concept, such as a value of the systolic blood pressure.
Observation Fact	The observation fact table represents the "fact" table of the RPDR Star Schema . The fact table can contain values associated with the concept, such as a value of the systolic blood pressure.
Observers	The individual or item making the observation.
Panel	This is one of the sections in the <i>query definition xml</i> . Query Panel encloses a group of query items and contains constraints like inversion and total occurrences.
patient_coll	Patient collection

Patient Data Object	A container of patient's visits, provider and observation facts.
Patient Identifier	A unique code assigned to a patient that links the patient and the clinical data.
Patient Number	An internal number in the CRC that is assigned to the patient. These numbers should not be modified.
Patient Set	A collection of patients which the researcher is interested in for a particular study. Patient set is an ordered collection of patient numbers that should not be modified. The order of the set is maintained all the time.
PID	Patient Identifier. See <i>Patient Identifier</i> for definition.
PDO	Patient Data Object. See <i>Patient Data Object</i> for definition.
Previous Query	Once a user runs a query it is stored as a "query master" and it becomes the first level on the query tree. These queries can be accessed via the Previous Query View.
Query	Mechanism for getting information from the database. Consists of concepts that are used as the search criteria to specify or narrow the results returned.
Query Definition	Contains all the outer tag information where each group is represented in a query as panels.
Visit	This represents a "session" where observations were made. This "session" can involve a patient directly such as a visit to a doctor's office, or it can involve the patient indirectly such as running several tests on a tube of the patient's blood. <i>Encounters, Events, and Visits</i> are all synonyms.
XML_RESULTS	The returned data from a query that is in xml format.